

ULTRA-HIGH PERFORMANCE GYRO MODULE



STIM202

PRODUCT BRIEF

- Small size, low weight and low cost
- ITAR free
- Insensitive to magnetic fields
- 0.5°/h bias instability
- 0.2°/√h angular random walk
- ±400°/s angular rate input range
- 1500g shock capability



(39mm x 45mm x 20mm)

STIM202 is a multi-axis gyro module with up to 3 axes of highly accurate MEMS gyros. Each axis is factory calibrated for bias and sensitivity, and compensated for temperature effects over the full temperature operating range.

For many applications STIM202 replaces FOG's and improve system solutions directly with respect to robustness, reliability, size/ weight, power and cost. STIM202 industrialization is realized by combining the well proven Sensoror ButterflyGyro™ technology with full digital operation.

Input range, orthogonality and output formats

The STIM202 full-scale angular rate input range is 400°/s and the output is capped at ±480°/s. 3-axis modules feature electronic axis alignment, improving orthogonality between axis (down to 1mrad). Selectable output formats are angular rate, increment angle, average angular rate and integrated angle, at sampling rates up to 1000 samples per second.

Reliability and robustness

Perfect tuning of excitation and detection frequencies, as well as perfectly balanced vibrational masses, result in very low sensitivity to vibration and shock. For use in extreme environments, the STIM202 provides a vibration isolated internal assembly to avoid rectification errors.

Power and Interface

The unit is powered by a single +5V supply and communicates via a Plug-and-Play high-level RS422 interface at bit rates up to 921600 bits/s.

Device configurations and self diagnostics

The use of a 32-bit RISC ARM microcontroller provides flexibility in device configuration. Choices for output unit, sampling frequency, LP filter cut-off frequency, RS422 transmission bit rate, line termination ON/OFF, etc. can be done in device Service Mode. The Service Mode also provides the ability to perform single measurements on demand and access detailed diagnostics information.

Evaluation kits

STIM202 evaluation kits for PCI and USB connectivity are available. The PCI kit is the recommended choice for thorough characterization. The PCI kit supports all STIM202 RS422 transmission bit rates (374400, 460800 and 921600 bits/s). The USB kit is the alternative solution, e.g. for smaller, portable laptop setups, providing an excellent choice for quick gyro module configurations and shorter measurement series. The USB kit supports the default STIM202 RS422 transmission bit rate (460800 bits/s).


Applications

Typical STIM202 applications are attitude heading reference systems (AHRs), platform stabilization and pointing systems (antennas, cameras, gimbals,...), high performance industrial applications, unmanned aerial vehicles (UAVs), autonomous underwater vehicles (AUVs), automated ground vehicles (AGVs), space applications, and more. STIM202 can also open new markets, where adequate solutions previously have not yet been possible to realize.


SPECIFICATIONS

Parameter	Min	Nom	Max	Unit
Weight		55		g
Input range		±400		°/s
Resolution		24		bit
Operating temperature	-40		85	°C
Storage temperature	-50		90	°C
Power supply	4.5	5.0	5.5	V
Supply current		200		mA
Start-up time		10		s
Sample Rate			1000	SPS
Dynamic overload			5000	°/s
Mechanical shock			1500	g
Bias instability (Root Allan Variance)	0.5			°/h
Angular random walk (Root Allan Variance)	0.2			°/√h
Bandwidth (-3dB)			262	Hz
Non-linearity (BSL over +/- 200 °/s)			200	ppm
Scale Factor accuracy	±0.2			%
Bias error over temperature gradients	±30			°/h rms
Linear acceleration effect			18	°/h/g
RS422 bit rate			921600	bit/s
Input resistance (termination ON)		120		Ω
Input resistance (termination OFF)				Ω
Logic levels NRST and EXT TRIGGER pins	CMOS and TTL compatible			

ELECTRICAL CONNECTIONS

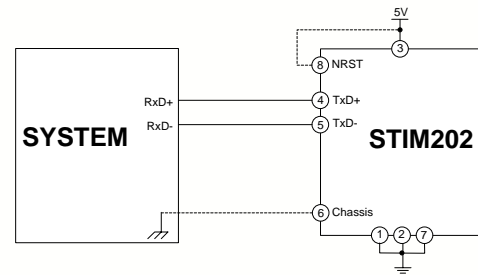


(TRANSMIT ONLY)

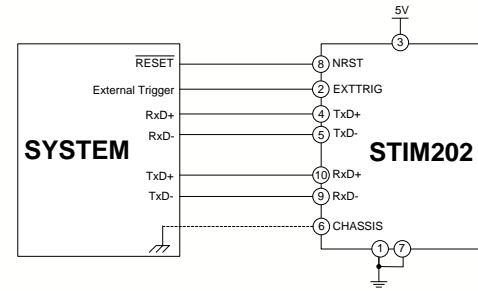


(FULL FUNCTION)

FUNCTIONAL BLOCK DIAGRAM

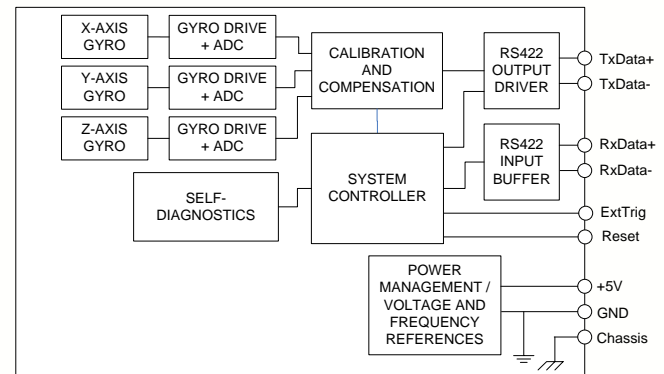


MECHANICAL DIMENSIONS


All dimensions in mm.

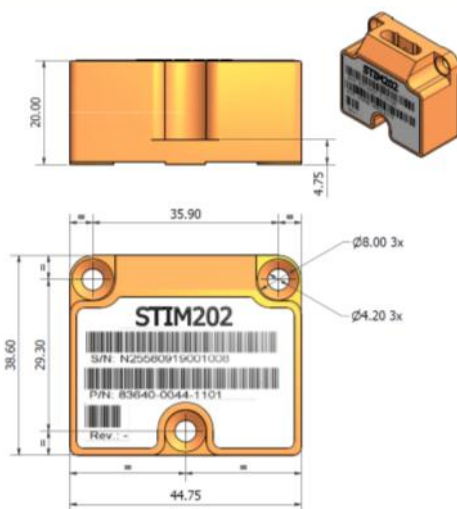

PIN OUT



AXIS DEFINITIONS



Information furnished by Sensoror Technologies is believed to be accurate and reliable. However, no responsibility is assumed by Sensoror Technologies for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Sensoror Technologies reserves the right to make changes without further notice to any products herein. Sensoror Technologies makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Sensoror Technologies assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. No license is granted by implication or otherwise under any patent or patent rights of Sensoror Technologies. Trademarks and registered trademarks are the property of their respective owners. Sensoror Technologies products are not intended for any application in which the failure of the Sensoror Technologies product could create a situation where personal injury or death may occur. Should Buyer purchase or use Sensoror Technologies products for any such unintended or unauthorized application, Buyer shall indemnify and hold Sensoror Technologies and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable legal fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Sensoror Technologies was negligent regarding the design or manufacture of the part.